

PRODUCT DESCRIPTION

The multiswitches are designed for use in medium and large size SAT and terrestrial TV distribution systems. The multiswitches ensure an independent access of every subscriber to any SAT IF or terrestrial line.

The housing of multiswitches meets more stringent screening requirements according to EN50083-2, class A. The multiswitches are intended for indoor use only.

SAFETY INSTRUCTIONS

Installation of the multiswitches must be done according IEC60728-11 and national safety standards.

The multiswitches are powered from the stabilized power supply +18V. This voltage is not dangerous to life.

External power supply must have a short circuit protection.

Any repairs must be done by a skilled personnel.

To avoid damaging of the multiswitch do not connect the supply voltage until all cables have been connected correctly.

The mains socket must be easily accessible.

Avoid placing the multiswitch next to central heating components and in areas of high humidity.

If the multiswitch has been kept in cold conditions for a long time, keep it in warm room no less than 2 hours before powering.

The ventilation should not be impeded by covering the ventilation openings with items, such as newspapers, tablecloths, curtains.

Mount the multiswitch in vertical position with RF input connectors on the left side.


From top, front and bottom of installed multiswitch must be at least 5 cm free space.

WARNING! Before connecting cables to multiswitch, be sure that cables shield and multiswitch functional grounding clamp have common potential. Otherwise, floating voltage can damage product.

MONTAGE VIEW

Mount the multiswitch in vertical position with RF input connectors on the left side. The multiswitch must be fixed with screws. The screws are not included in a package.

Vers. 1.06

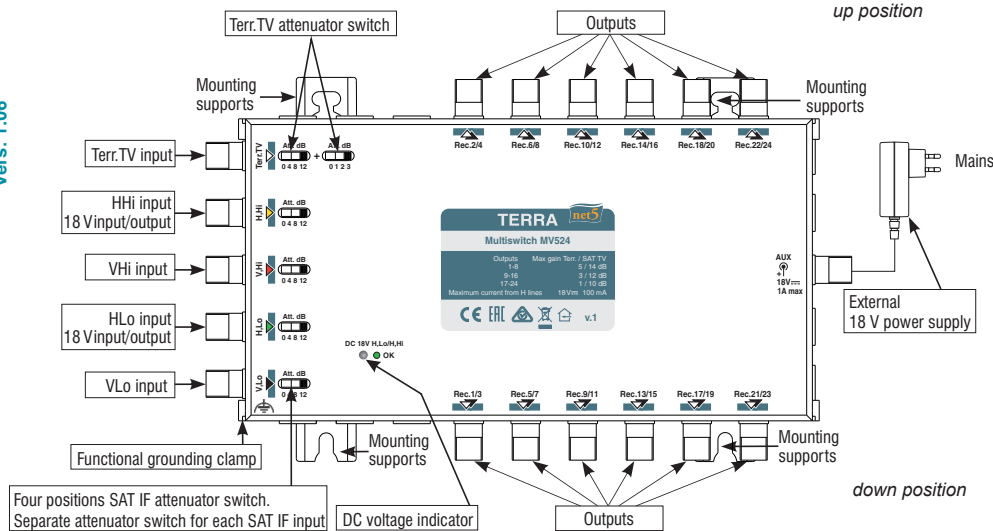

OPERATING

Each SAT IF input line has a separate four positions attenuator with 0, 4, 8, 12 dB attenuation values.

Terrestrial TV input line has two four positions attenuator with 0, 4, 8, 12 dB and 0, 1, 2, 3 dB values. Total attenuation value is the sum of attenuation values of each separate attenuator. For example: first attenuator set to 4 dB, second to 1 dB. Total attenuation will be 5 dB.

Access to SAT TV lines is controlled by 14/18 V and 0/22 kHz signals, which come from subscriber's receiver through RF cable. Terrestrial TV path is powered through horizontal polarization SAT TV lines (H, Lo; H, Hi). Horizontal polarization lines inside distribution system are powered from launch amplifier (SA51), but they should be powered from external 18 V power supply connected to rear side DC connector AUX in the case of installation of single multiswitch. Current through this connector should not exceed 1 A max.

TECHNICAL CHARACTERISTICS

| Type | MV524 | MV532 | |
|---|----------------------|----------------------|-----------|
| Ordering number | 02723V1 | 02724V1 | |
| Number of outputs | 24 | 32 | |
| Frequency range | SAT IF | 950-2400 MHz | |
| | Terr. TV | 47-862 MHz | |
| Gain (fixed slope pre-correction) | SAT IF | outputs 1-8 | 5 ÷ 14 dB |
| | | outputs 9-16 | 4 ÷ 12 dB |
| | | outputs 17-24 | 3 ÷ 10 dB |
| | | outputs 25-32 | - |
| | Terr. TV | outputs 1-8 | -1 ÷ 5 dB |
| | | outputs 9-16 | -2 ÷ 3 dB |
| | | outputs 17-24 | -3 ÷ 1 dB |
| | | outputs 25-32 | - |
| Gain adjustment | SAT IF | 12 dB by 4 dB step | |
| | Terr. TV | 15 dB by 1 dB step | |
| Output level for SAT IF (IMD3=35 dB)* | | 105 dBμV | |
| Output level for Terr. TV (IMD3=60 dB)* | outputs 1-8 | 86 dBμV | |
| | outputs 9-16 | 84 dBμV | |
| | outputs 17-24 | 82 dBμV | |
| | outputs 25-32 | - | |
| SAT inputs decoupling | | ≥ 30 dB | |
| Outputs decoupling | SAT IF | ≥ 27 dB** | |
| | Terr. TV | ≥ 35 dB | |
| Rejection | Terr. TV/SAT | ≥ 30 dB | |
| | SAT/Terr. TV | ≥ 40 dB | |
| Current consumption from receiver | | < 65 mA | |
| Current consumption from inputs H lines or from external power supply | | +18 V 100 mA | |
| Control signals | | 14/18 V, 0/22 kHz | |
| Operating temperature range | | -20° ÷ + 50° C | |
| Dimensions/Weight (packed) | 227x135x50 mm/1.5 kg | 267x135x50 mm/1.9 kg | |

* 2 equal carriers

** in splitting mode (the same input selected on the outputs) isolation ≥ 24 dB

This product complies with the relevant clauses of the European Directive 2002/96/EC. The unit must be recycled or discarded according to applicable local and national regulations.

Equipment intended for indoor usage only.

Functional grounding. Connect to the main potential equalization.

This product is in accordance to following norms of EU: EMC norm EN50083-2, safety norm EN IEC62368-1, RoHS norm EN50581.

This product is in accordance with Custom Union Technical Regulations: "Electromagnetic compatibility of technical equipment" CU TR 020/2011, "On safety of low-voltage equipment" CU TR 004/2011.

This product is in accordance with safety standard AS/NZS 60065 and EMC standards of Australia.