



Supplements for masthead products

Power supplies


CABRIOLINE

- power supplies for remote DC feeding through RF input with various quantities of outputs
- DC and tone pass (PI011 only)
- protection and indication of DC feeding overload
- die-cast housing inside plastic case



Technical specifications		
T Y P E	PI008	PI011
Ordering number	02548	02559
Frequency range	47-862 MHz	47-2150 MHz
Loss	4 dB (2 RF isolated outputs)	2 dB (1 RF output)
DC feeding for external	12 V 0.1 A max.	11.5 V 0.1 A max.
DC pass	-	12 V ÷ 18 V 0.5 A max.
Power consumption	230 V~ 50/60 Hz 4 W	
Dimensions/Weight (packed)	133x63x39 mm/0.36 kg	

- power supply with power inserter, F socket - F socket

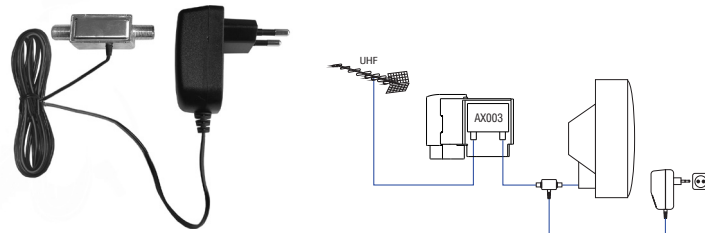

Technical specifications	
T Y P E	ZS500
Ordering number	00627
DC output	+12 V 0.5 A
Frequency range	40-2100 MHz
Attenuation	1 dB
Output connector	F
Mains voltage	100-240 V~ 50/60 Hz
Dimensions/Weight (packed)	57x81x49 mm / 0.085 kg