




Modular reception system


Installation set and accessories

Application example

Connections diagram

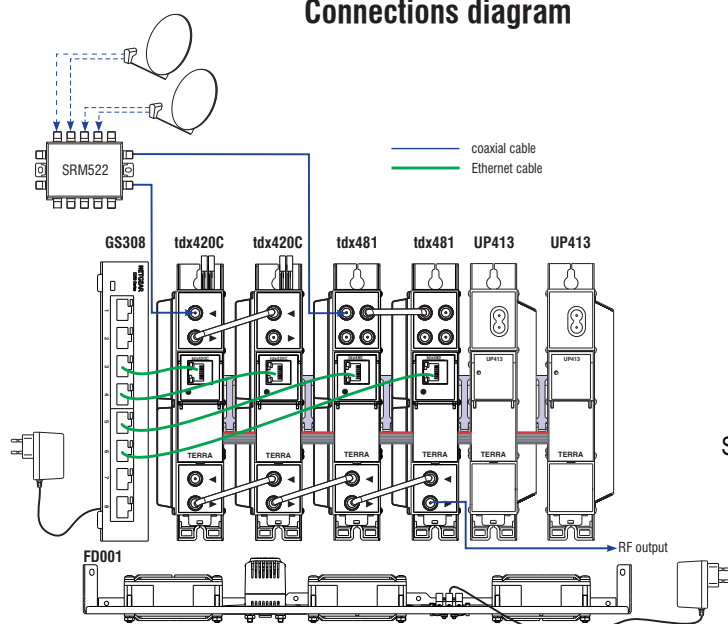

View

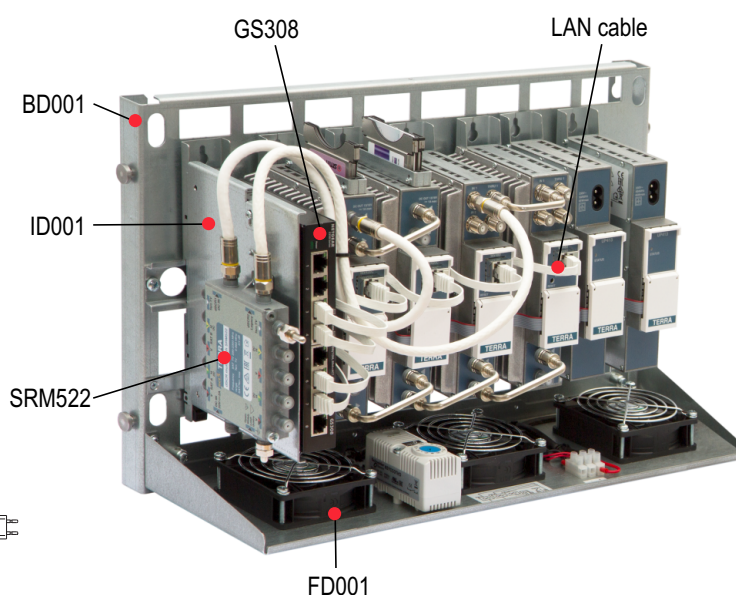

SRM522 - dSCR cascadable single cable multiswitch

tdx420C - twin transmodulator with two CAMs

tdx481 - octo transmodulator

UP413 - power supply



- Base plate BD001:
capacity 8 modules, dimensions 463x297x38 mm
- Cover CD001:
Dimensions 455x297x210 mm
Dimensions / Weight (packed) of the set 463x297x212 mm / 7 kg
Ordering number of the set 14820

ID001



- DIN rail holder ID001 for mounting on base plate BD001
- Dedicated for mounting NetGear GS308 ethernet switch and SRM522 dSCR multiswitch, right angle 5.5/2.1 mm adapter in scope
- Dimensions / Weight (packed) DIN rail holder 198x134x41.5 mm / 0.44 kg
Ordering number 14822

GS308



- NetGear GS308 - unmanaged ethernet switch, 10/100/1000 Mbps, 8 ports
- DC powering 12 V 320 mA, power supply unit included
Ordering number 14823

FD001



- Ventilation unit with thermostat FD001
- DC powering 12 V 300 mA, power supply unit included
- Dimensions / Weight (packed): 447x140x52.5 mm / 1.5 kg
Ordering number 14821



- Flat LAN cable, 0.5 m length
Ordering number 14824